

**TECNOVAP**

L'ARTE DEL VAPORE

english

# Bacchus Static





# Bacchus Static

kW 7,2 | 10,8 | 14,4 | bar 6

## Technical features



Operating pressure  
6bar



Water mains connection



Control panel




Boiler maintenance signal



Steam cleaner with stainless-steel body and boiler, able to deliver dry saturated steam at 165°C.

- Water supply through water mains only.
- This model can be used only with the bacchus foodgrade silicone hose.

For the cleaning of:



MICROFILTRATION SYSTEMS



BOTTLING LINES



STAINLESS STEEL TANKS



BARRIQUES TONNEAUX

Indicated for wineries with production capacity of:



BARREL ROOM  
up to 50 barrels\*

BOTTLING LINE  
up to 3.000 bottles\*



\*approx data



### Steam cleaner

Boiler	Stainless steel AISI 304 with interchangeable heating element			
Body	Stainless steel AISI 304 BA			
Power supply	V - Hz	3~400 - 50/60		
Boiler output	kW/h	7,2	10,8	14,4
Boiler volume	l	11		
Operating pressure	bar	6		
Steam production	g/min	194	272	388
	Kg/h	11,5	17,5	23
Steam T°	° C	165		

### Various

Weight	Kg	-
Power cable	m	8
Dimensions	cm	H.107 x L.39,6 x W. 69,3
Pallet	cm	115x65x125
Unit/pallet	pcs	1

## Accessories


Bacchus Static can be used with following accessories:



Bacchus foodgrade silicone hose  
4m - 8m - 10m



Bacchus foodgrade silicone hose  
predisposed for pressure switch connection  
4m - 8m - 10m

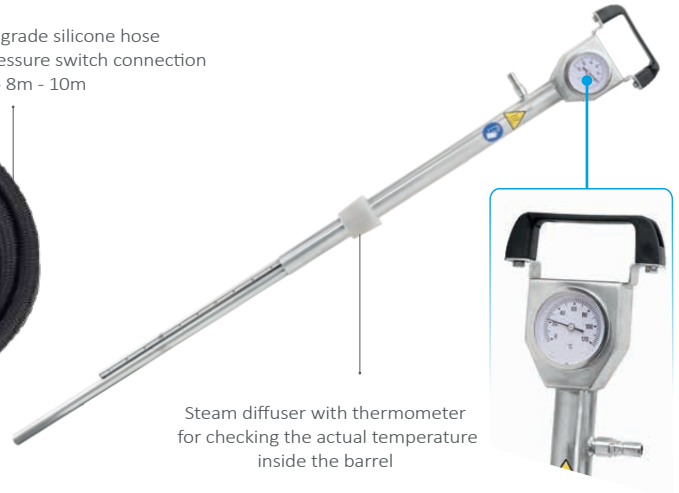

Steam diffuser with thermometer  
for checking the actual temperature  
inside the barrel



GAROLLA  
with or without safety valve  
Ø40mm - Ø50mm - Ø60mm



DIN  
with or without safety valve  
Ø32mm - Ø40mm - Ø50mm - Ø60mm



## Applications



Would you like to discover  
the cleaning possibilities with  
dry saturated steam?



SCAN ME!

Need more information?  
Don't hesitate to contact us!

 +39 045 67 67 252

 sales@tecnovap.com - info@tecnovap.com

 www.tecnovap.it

Follow us



L'ARTE DEL VAPORE

Tecnovap S.r.l.  
Via dei Sassi 1/a, 37026 Pescantina, Verona - Italy